



VSRT™

VERTICAL SPIRAL RIB
TUBELESS STEAM BOILERS

10 – 60 BHP



SETTING THE STANDARD AGAIN

INDUSTRY LEADING EFFICIENCIES

Optimized design yields efficiencies up to 86% with a turndown ratio up to 10:1 and less than 20 ppm NOx emissions standard.

HIGHEST STEAM QUALITY AVAILABLE

VSRT boilers feature a tall steam space and generous steam release area which contribute to steam quality of 99.75% or greater.

COMPACT VERTICAL FOOTPRINT

VSRT boilers up to 30 BHP will fit through a standard doorway. Whether a new system or a retrofit, installation has never been easier.

FULLY WETTED PRESSURE VESSEL

All heat exchanger surfaces are water backed and poured refractory is eliminated from the design, resulting in exceptionally low jacket temperatures.



In 1949, Fulton pioneered the vertical tubeless design which quickly became the industry standard for industrial steam boilers. Since that time, no one has been able to improve upon Fulton's original design.

Now Fulton is raising the bar with the VSRT (Vertical Spiral Rib Tubeless) boiler, the world's first fully wetted, refractory-free vertical tubeless boiler and the new standard for industrial steam boiler design.

Optimized using **PURE Technology**, the VSRT provides the highest efficiencies available combined with a compact vertical footprint. VSRT boilers are built to last as a reliable source of clean steam, providing cost savings and operator peace of mind for years to come.

BETTER BY DESIGN

PURE Technology is the culmination of Fulton's clean-slate design approach. Based on comprehensive system optimization, PURE Technology radically challenges the status quo and empowers our engineers to create the best solutions possible, unhindered by traditional design trade-offs.

PURE
OPTIMIZED
www.fulton.com/pure

MORE THAN **15** PATENTS PENDING WORLDWIDE FOR THE VSRT


A REVOLUTION IN STEAM BOILER DESIGN


Fulton's patent pending spiral rib heat exchanger achieves industry leading heat transfer rates. The unique spiral design provides a long heat transfer path which is optimized to achieve maximum heat transfer in a compact space.

The VSRT features a **fully water backed pressure vessel** wrapped with high-density insulation, resulting in minimal thermal losses and low jacket temperatures.

A LOOK INSIDE:

- 1 Air/fuel mixture enters into the combustion chamber
- 2 PURE optimized burner features up to 10:1 turndown with exceptionally low emissions
- 3 Combustion gases transition downward from the combustion chamber into the spiral heat exchanger
- 4 Flue gases spiral upward through our patent-pending heat exchanger
- 5 Flue gases exit the boiler

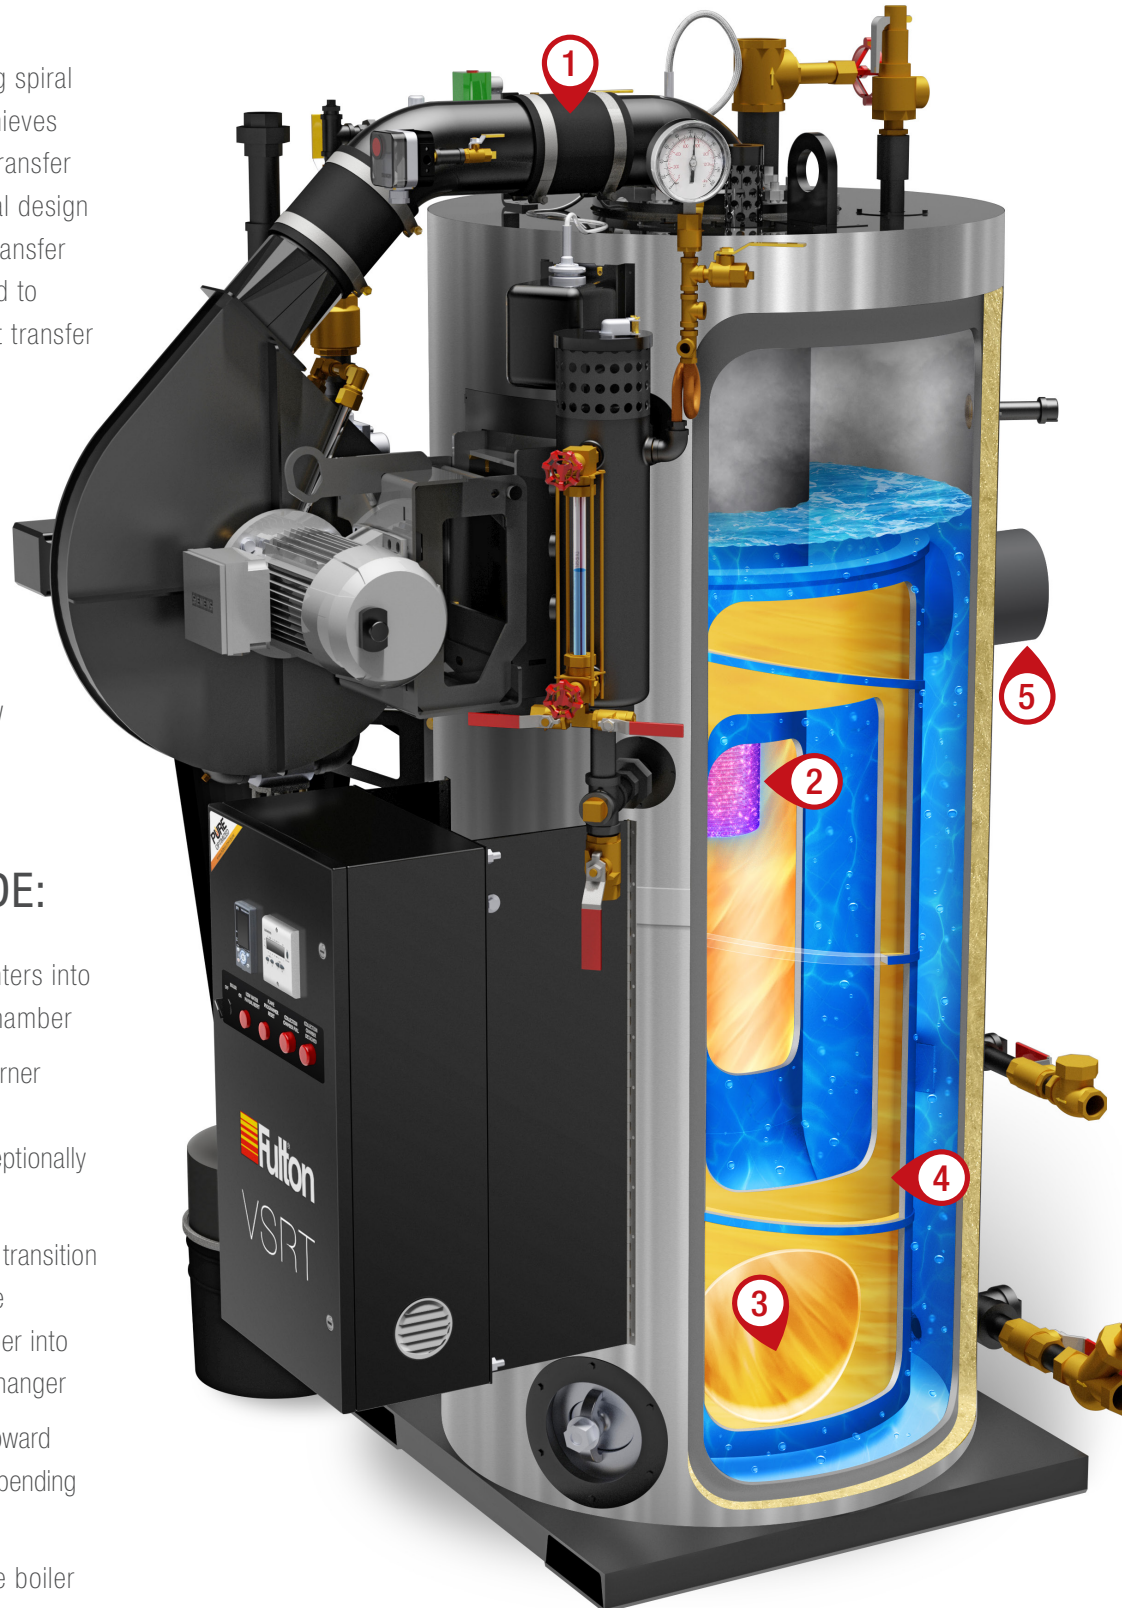


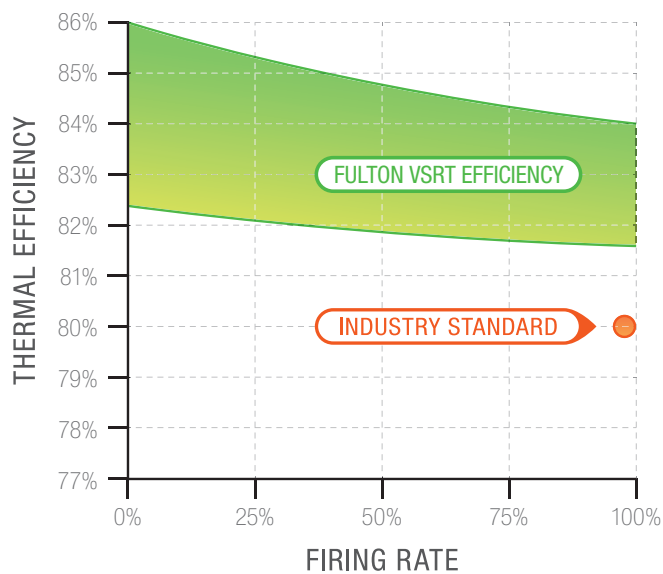

LOWEST OPERATING COSTS

As the world's first and only spiral rib tubeless design, the VSRT has been optimized so that the spiral rib heat exchanger can transfer the most amount of heat in the most compact space.

- INDUSTRY LEADING THERMAL EFFICIENCIES
- TURNDOWN UP TO 10:1, FULL MODULATION
- 20 PPM NOx STANDARD
- VARIABLE SPEED FAN
- LINKAGELESS CONTROLS

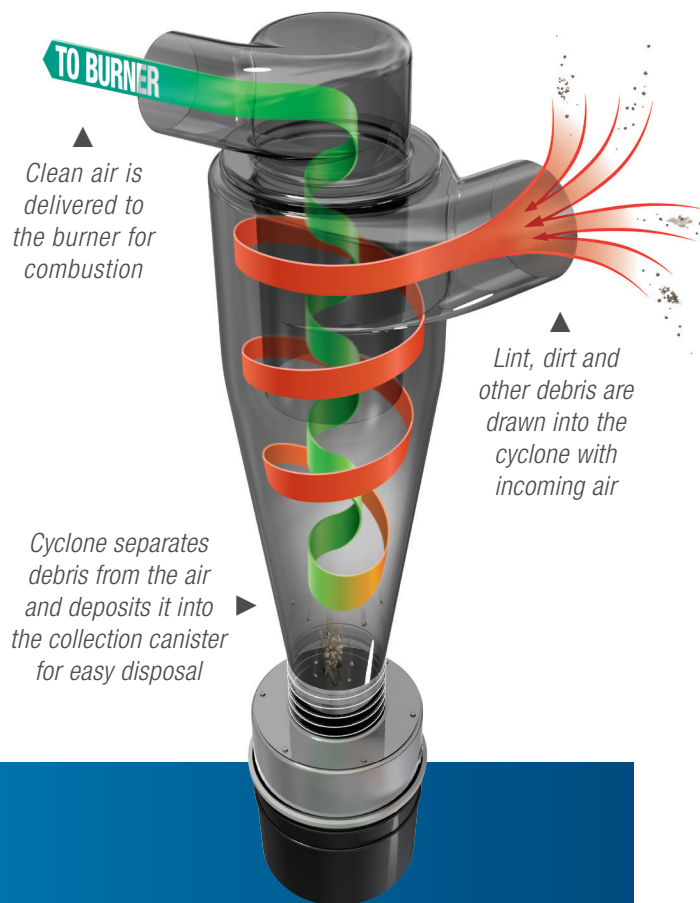

MEDIA FREE CYCLONIC AIR FILTER

Fulton's patent-pending cyclonic air filter effectively clears the combustion air of damaging particles. Our cyclonic filter won't clog over time and it eliminates the need for replacement filters.

DURABLE PRESSURE VESSEL

The VSRT has a patent pending, self-compensating stress relieving architecture. Our spiral rib heat exchanger is fully immersed in water to optimize heat transfer, creating a longer-lasting boiler that beats the competition in every category of durability.

- FULLY WETTED, REFRACTORY-FREE DESIGN
- THERMAL STRESSES VIRTUALLY ELIMINATED
- VERTICAL TUBELESS DESIGN VIRTUALLY ELIMINATES CORROSION
- 10-YEAR PRESSURE VESSEL WARRANTY

EASE OF OWNERSHIP


Fulton's team of engineers considered every aspect when designing the VSRT. From high-grade controls and easy-to-access maintenance points, to our breakthrough cyclonic air filtration.

- INDUSTRIAL CONTROL PLATFORM
- EASY ACCESS TO THE PRESSURE VESSEL
- 5-YEAR BURNER WARRANTY

CUSTOM ENGINEERED SOLUTIONS


With extensive engineering experience, Fulton's team can design and build a system tailored to your specific needs. From concept to delivery, you are part of the process, ensuring timely and accurate completion of your custom engineered system.

- INDUSTRY LEADER IN SYSTEMS ENGINEERING
- SINGLE-SOURCE TURNKEY SYSTEMS
- WIDE RANGE OF ANCILLARY EQUIPMENT
- 10 YEAR PRESSURE VESSEL WARRANTY

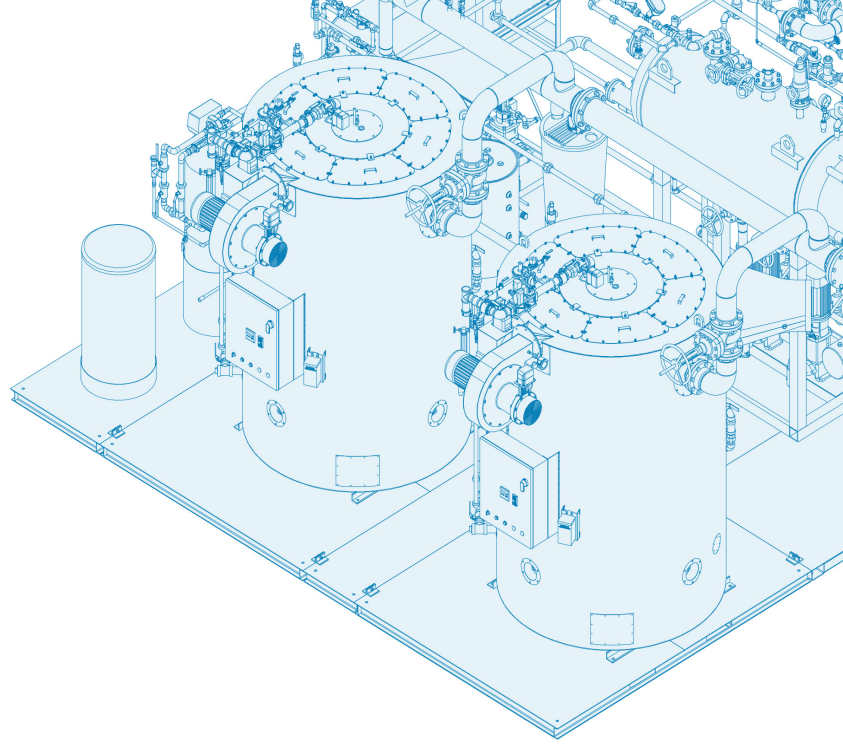

SPECIFICATIONS AT A GLANCE

MODEL: VSRT		10	15	20	30	40	50	60
SPECIFICATIONS								
Fuel Input	MBH	400	600	800	1,200	1,600	1,993	2,392
Steam Output, F&A 212°F	LB/HR	345	518	690	1,035	1,380	1,725	2,070
Output	MBH	335	503	670	1,005	1,340	1,674	2,008
Water Capacity	GAL	102	102	112	112	333	333	333
Turndown Ratio		4:1	6:1	4:1	6:1	6:1	8:1	10:1
DIMENSIONS								
(A) Height w/o Trim	IN	70	70	79.25	79.25	97.38	97.38	97.38
(B) Height w/ Trim	IN	77	77	86	86	107	107	107
(C) Height w/ Burner Pull	IN	99	99	111	110	130	130	130
(D) Width w/o Trim	IN	32.5	32.5	32.5	32.5	49	49	49
(E) Width w/ Trim	IN	57	57	61	60	68	68	68
(F) Depth	IN	53	53	59	62	83	83	83
Steam Outlet (150 psi, NPT)	IN	1	1.25	2	2	4	4	4
Feedwater Inlet (NPT)	IN	1	1	1	1	1	1	1
Main Blowdown (NPT)	IN	1	1	1.25	1.25	1.5	1.5	1.5
Surface blowdown (NPT)	IN	0.75	0.75	0.75	0.75	0.75	0.75	0.75
Safety Valve Outlet (150psi, NPT)	IN	1	1	1	1	1	1.25	1.25
Natural Gas Inlet (NPT)	IN	1	1	1	1.25	1.5	1.5	1.5
Air Inlet	IN	4	4	6	6	6	6	6
Flue	IN	6	6	8	8	10	10	10
WEIGHTS								
Approximate Shipping Weight	LB	2,900	2,900	3,400	3,400	6,000	6,000	6,000
Approximate Operating Weight	LB	3,500	3,500	4,100	4,100	7,864	7,864	7,864
Approximate Flooded Weight	LB	3,850	3,850	4,400	4,400	8,600	8,600	8,600

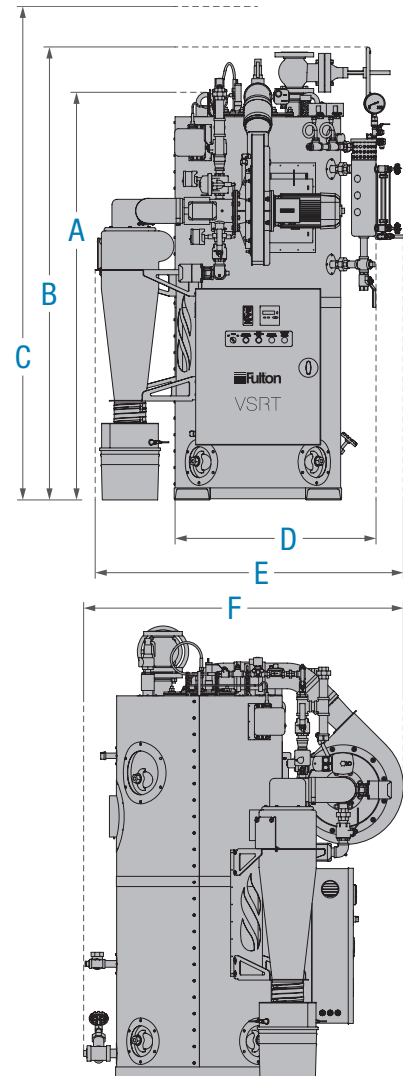

NOTE: Specifications and dimensions are approximate and for reference purposes only. Fulton reserves the right to change specifications and/or dimensions without notice. Graphics contained in this brochure may not be representative of actual product.

OPTIMIZE YOUR BOILER SYSTEM

Fulton has been a family owned manufacturer of heat transfer equipment since 1949. VSRT boilers are available through a worldwide network of authorized representatives. Your local representative will assist you in the selection of Fulton equipment to best meet your application needs.



Find your local sales
representative online at:

www.fulton.com/sales



Fulton Steam Solutions, Inc.
972 Centerville Road
Pulaski, NY 13142
(315) 298-5121

Printed in the U.S.A.
VSRT_BRO_2020-1109



FOOD PROCESSING



HEALTHCARE



PHARMACEUTICAL
PROCESSING



COMMERCIAL
BUILDINGS



LAUNDRY &
DRY CLEANING



BREWING &
DISTILLERIES



CLEAN STEAM



MANUFACTURING



/FULTON-COMPANIES



/FULTONBOILER



@FULTONBOILER

Learn more about
Fulton products and
services online at:
www.fulton.com